HERTZ

www.hertzaudiovideo.eu

UNO

The Sound Experience



X 165


TWO WAY COAXIAL

220 W

1. Neodymium tweeter with PEI dome, for a brilliant reproduction of high frequencies and compactness.
2. Tweeter faceplate optimized for exceptional off-axis performance.
3. High stiffness metallic-grey finish pressed-paper cone with water-repellent treatment.
4. Foam surround combining high sensitivity and deep bass response.
5. Pure copper 25mm (1 in.) voice coil woofer for high dynamic power handling.
6. High flux density 80mm (3.15 in.) ferrite magnet for a powerful undistorted sound.
7. Easy-to-install DIN size basket protected by abrasion-resistant dust paint.

TECHNICAL SPECIFICATIONS

Component		Two way coaxial
Size		
Woofer	mm (in.)	165 (6.5)
Tweeter diaphragm	mm (in.)	24 (0.9)
Voice Coil Ø		
Woofer	mm (in.)	25 (1)
Tweeter	mm (in.)	14 (0.55)
Power Handling	W peak	220
	W continuous	55
Sensitivity	dB SPL	93.5
Impedance	Ω	4
Frequency Response	Hz	60 ÷ 21k
Woofer Magnet size D x d x h	mm (in.)	80 x 40 x 15 (3.15 x 1.57 x 0.59)
Tweeter Magnet size D x d x h	mm (in.)	13 x 1,5 (0.51 x 0.06)
Weight of one speaker	kg (lb.)	0,73 (1.61)
Woofer Magnet	High density flux ferrite	
Tweeter Magnet	Neodymium	
Cone	Water-repellent pressed paper	
Dome	PEI	
Xmech	mm (in.)	±3,5 (0.14)

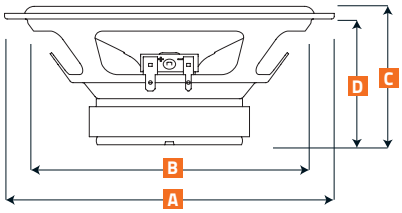

A	164,6 mm	6.48 in.
B	144 mm	5.67 in.
C	69 mm	2.72 in.
D	63 mm	2.48 in.

All specifications subject to change without notice_16.C

Technology & Art of Sound
Manufactured by elettromedia Italy

Elettromedia - 62018 Potenza Picena (MC) Italy - T +39 0733 870 870 - F +39 0733 870 880 - www.elettromedia.it