HERTZ

www.hertzaudiovideo.eu

UNO




The Sound Experience

X 690

FOUR WAY COAXIAL

340 W

1. Double 15 mm piezoelectric super-tweeter with PEI dome to extend the frequency response above 20 kHz.
2. 40 mm PEI tweeter with ferrite motor, for a brilliant reproduction of mid-high frequencies and compactness.
3. Tweeter and super-tweeter faceplate optimized for exceptional off-axis performance.
4. High stiffness metallic-grey finish pressed-paper cone with water-repellent treatment.
5. Foam surround combining high sensitivity and deep bass response.
6. Pure copper 25mm (1 in.) voice coil woofer for high dynamic power handling.
7. High flux density 80mm (3.15 in.) ferrite magnet for a powerful undistorted sound.
8. Easy-to-install DIN size basket protected by abrasion-resistant dust paint.

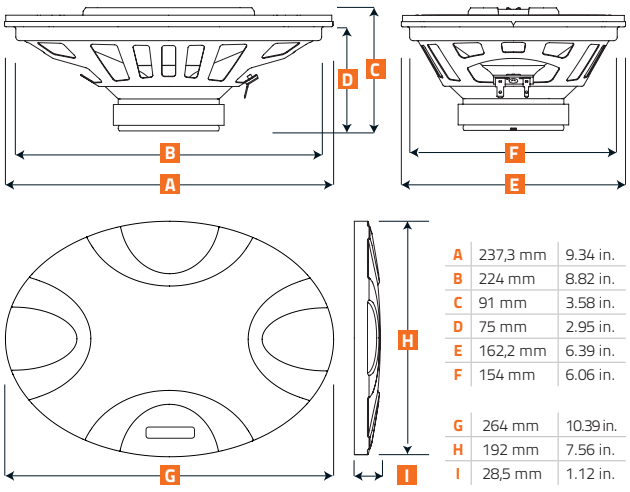

A	237,3 mm	9.34 in.
B	224 mm	8.82 in.
C	91 mm	3.58 in.
D	75 mm	2.95 in.
E	162,2 mm	6.39 in.
F	154 mm	6.06 in.
G	264 mm	10.39 in.
H	192 mm	7.56 in.
I	28,5 mm	1.12 in.

TECHNICAL SPECIFICATIONS

Component		Four way coaxial
Size		
Woofer	(in.)	6 x 9
Tweeter diaphragm	mm (in.)	40 (1.6)
Supertweeter diaphragm	mm (in.)	2 x 15 (0.6)
Voice Coil Ø		
Woofer	mm (in.)	25 (1)
Tweeter	mm (in.)	20 (0.8)
Power Handling	W peak	340
	W continuous	85
Impedance	Ω	4
Frequency Response	Hz	45 ÷ 22k
Sensitivity	dB SPL	94
Woofer Magnet size D x d x h	mm (in.)	80 x 40 x 15 (3.15 x 1.57 x 0.59)
Weight of one speaker	kg (lb.)	0,93 (2.05)
Woofer Magnet	High density flux ferrite	
Tweeter Magnet	Ferrite	
Cone	Water-repellent pressed paper	
Dome	PEI	
Xmech	mm (in.)	±4,3 (0.17)

All specifications subject to change without notice_ 16.C

Technology + Art = Sound
Manufactured by elettromedia Italy

Elettromedia - 62018 Potenza Picena (MC) Italy - T +39 0733 870 870 - F +39 0733 870 880 - www.elettromedia.it