
# SIR 060

ISTRUZIONE DI MONTAGGIO
FITTING GUIDE

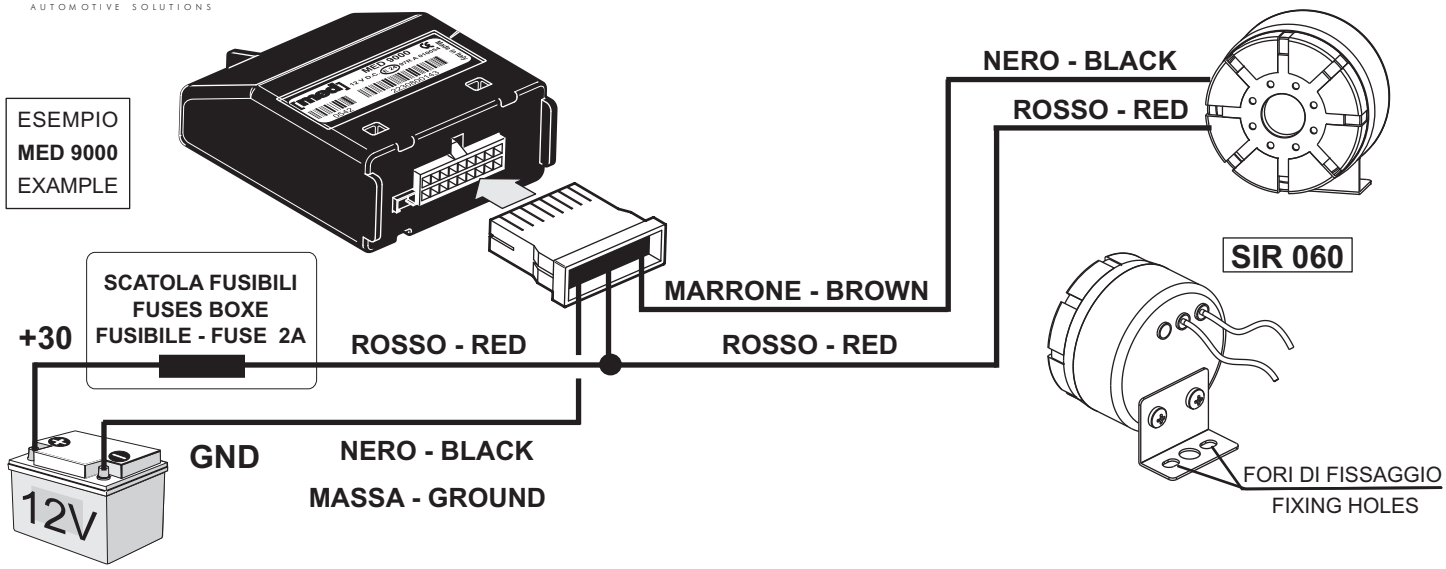


FISSARE COL CAVO CHE SALE DAL BASSO, DISTANTE DA FONTI DI CALORE INTENSO (COLLETTORI DI SCARICO, ETC.), PROTETTA DA SPRUZZI CONSISTENTI DI LIQUIDI.

FASTEN WITH THE CABLE COMINGUP FROM BELOW, AWAY FROM INTENSE HEAT SOURCES (EXHAUSTS, ETC) PROTECTED AGAINST CONSISTENT LIQUID SPRAYS.

La **SIR 060** è la nuova sirena universale adatta al tutte le centrali di allarme.

Accetta comandi NEGATIVI o POSITIVI (fissi durante tutto il ciclo di allarme).

**Può essere impiegata anche come sirena ausiliaria, in aggiunta alla sirena principale autoalimentata.**

## MANUTENZIONE:

Non è richiesta alcuna manutenzione specifica.

**ATTENZIONE!! In caso di lavaggio del motore occorre proteggerla adeguatamente.**

## GARANZIA:

La GARANZIA TECNICA ha durata di 24 mesi a partire dalla data di installazione, franco fabbrica, per le parti ritenute difettose ad insindacabile giudizio A.E.B. S.p.A.

Sono ESCLUSE da tale forma di copertura spese di manodopera esterna ed ogni altro onere a qualsiasi titolo.

Il CERTIFICATO DI INSTALLAZIONE della centrale abbinata, compilato e firmato, riportante l'etichetta col numero di matricola della sirena è valido anche per la GARANZIA del prodotto.

## IMPORTANTE!!

- A.E.B. S.p.A declina ogni responsabilità e sospende la GARANZIA in caso di utilizzo improprio del prodotto o di parte di esso, di manomissione o di abbinamento a dispositivi non previsti.
- L'installazione deve essere effettuata da personale qualificato.

## CARATTERISTICHE TECNICHE:

| | |
|---|---|
| Tensione di alimentazione: | **12 Vdc** (nominali) - 8 / 16 Vdc |
| Assorbimento di corrente: (valori medi) | **0 mA** (a riposo) - **300 mA** (in allarme) |
| Campo di temperatura: | da **- 40 °C** a **+ 85 °C** |
| Protezione: | **IP 66** (IEC 529 1989) DIN 40050 EN 60529 |
| Dimensioni: | **60** x **60** x **38 mm** |

The **SIR 060** is the new universal siren suitable for all kind of alarms.

It accepts either the NEGATIVE or the POSITIVE controls (fix for the duration of the alarm cycle).

**It can be installed also as an additional siren to the self fed main one.**

## MAINTENANCE:

The siren requires no maintenance.

## CAUTION:

**When washing the engine, ensure that the siren is protected.**

## WARRANTY CONDITIONS:

The technical warranty has a duration of 24 months from the date of installation, ex-works, covering the parts which A.E.B. S.p.A. Considers to be faulty, according to its own indisputable judgement.

This warranty does not cover external labour costs and any other costs whatsoever.

The CERTIFICATE OF INSTALLATION of the paired central unit is valid also as WARRANTY after having been filled in, signed and completed with the label containing the code number of the siren.

## WARNING !!!

- A.E.B. S.p.A. declines all responsibility and withdraws the WARRANTY in cases of: the improper use of the product or part there of, tampering with the product, its combination with devices for which it was not specifically designed.
- The device must be installed by specialised personnel.

## TECHNICAL FEATURES:

| | |
|---|---|
| Feeding voltage: | **12 Vdc** (nominal) - 8 / 16 Vdc |
| Current absorption: (average values) | **0 mA** (at rest) - **300 mA** (on alarm) |
| Temperature range: | from **- 40 °C** to **+ 85 °C** |
| Protection: | **IP 66** (IEC 529 1989) DIN 40050 EN 60529 |
| Dimensions: | **60** x **60** x **38 mm** |

Cod. 190.100.053 - Rev.02 del 28.05.2012 printed in italy

COMPANY WITH QUALITY SYSTEM CERTIFIED BY BUREAU VERITAS ISO 9001:2008

A.E.B. S.p.A. a socio unico / a single member Company - Via dell'Industria, 20
42025 - Corte Tegge - Cavriago (RE) - Italy
med è una divisione di / a division of A.E.B. S.p.A.
Ph.+39 0522 494486 - Fax +39 0522 494410 - e-mail: service@medautomotive.it
www.medautomotive.it