
Technical data

- Product dimensions: 332x116x76mm
- Power cable: 3,1m with cigar plug
- Power consumption: 22W
- LED quantity: 24pcs
- Working voltage: 12/24V
- Approvals, certificates:
  ECE R10, ECE R65, IP65
- Material of execution:
  Housing: AL.
  Lens: PC

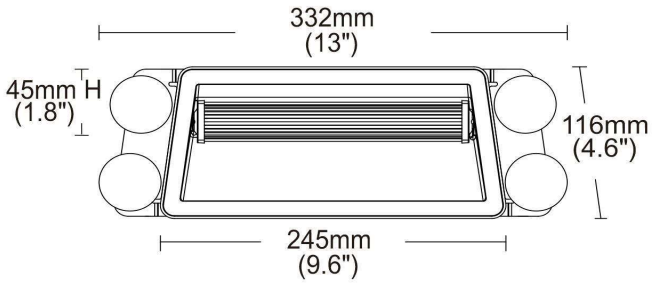

Functions

- Warning beacon, for automotive use only
- The lamp has R10 approval - electromagnetic compatibility and
  R65 approval - authorizing it to be used on public roads
- The lamp is intended for vehicles with 12/24V installation
- Quantity of flashes: 3 modes
- Light color: amber
- Reverse polarity protection
- Two levels of light intensity (class 2), changeable with a button
  in the cigarette lighter socket

MODES	DESCRIPTION
1	Single flash
2	Double flash
3	Quad flash

Press flash pattern button:
- Less than 1s for next pattern
- 3-5s for low power, 3-5s again back to high power





flash pattern
on/off

Mounting method, connection lamp

- Mounting the lamp using suction cups to the vehicle's windscreen
- Lamps must be installed only in accordance with the UNECE regulations
- Connection of the lamp with the instalation of the vehicle, the connection must be isolated with the heat shrink tube, it is neccessary
  to avoid ingress of water to the core of the wires, which can cause the damage to the electrican and electronical components of the lamp







- Wipe the wind sheild for better installation
- Measure and cut off the redundant length of adhesive stickers (supplied inpackage),
  stick on four sides and keep them on a surface level. Install on windshield
- Install the foam on four sides (supplied in package), sucked onto the windshield, adjust lighthead angle
  and tighten another side screw by spanner

Warnings

- Use as intended
- Use in airly places
- Do not touch the lamp during operation and immediately after it is turned off, the lamp may get warm
- Any unauthorized interference with the lamp (associated with its depressurization, interference with the electronic system, etc.)
  is associated with the loss of warranty
- The device must be installed and keeped out of reach of children

Important! Do not look directly in the light. It can cause the the eye damage

Correct disposal of the product (used electrical and electronic equipment)

Marking on the product or in the related texts indicates that it should not be disposed of with other household waste at the end of its useful life. To avoid damaging the environment and human health by uncontrolled disposal, please separate the product from another type of waste and recycle it responsibly to promote the reuse of material resources as a permanent practice. For information on where and how to safely recycle this product, household users should contact the retailer where they purchased the product. Users in companies should contact their supplier and check the terms of the purchase agreement.The product should NOT be disposed of with other commercial waste.

We reserve the right to change technical data and possible errors. Photos/drawing and technical data are only illustrative, and given product may slightly differ from them. Coping the part or the entire package without the written authorization is forbidden. All rights reserved.

Terms of warranty:
- we provide a guarantee for a period of 24 months from the date of sale,
- any unauthorized interference with the item entails the loss of the guarantee.