STEELMATE Automotive



Category: Wireless Parking Assist System


Model No.: PTS400W1-COM

Product Photo: Waterproof ECU Wireless speaker



D: 56 * W76*H30 mm

Package Photo: Color box

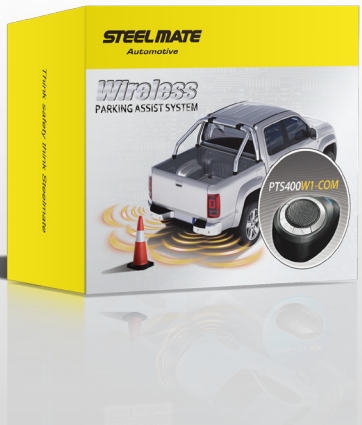

Certification: TBA

Includes:



ECU	X	1 pc
W1 Wireless speaker	X	1 pc
14D-12 sensor	X	4 pcs
Sensor wire	X	4 pcs
Sensor bracket	X	4 pcs
Hole saw (18.8mm)	X	1 pc
Manual	X	1 pc


Key Features - System:

- 4-rear parking assist system with wireless human voice speaker
- Learning function
- Human voice warning (ON/OFF)
- 4-session audible warning
- System activates automatically when gear “R” selected
- Volume adjustable
- Precise detection range
- Self-testing function
- Anti-false alert technology

Key Features – Sensor:

- Sensors work in plastic and metal bumpers
- Waterproof connector
- Wide operating temperature (-40℃~+80℃ / -40℉~+176℉)

Installation:

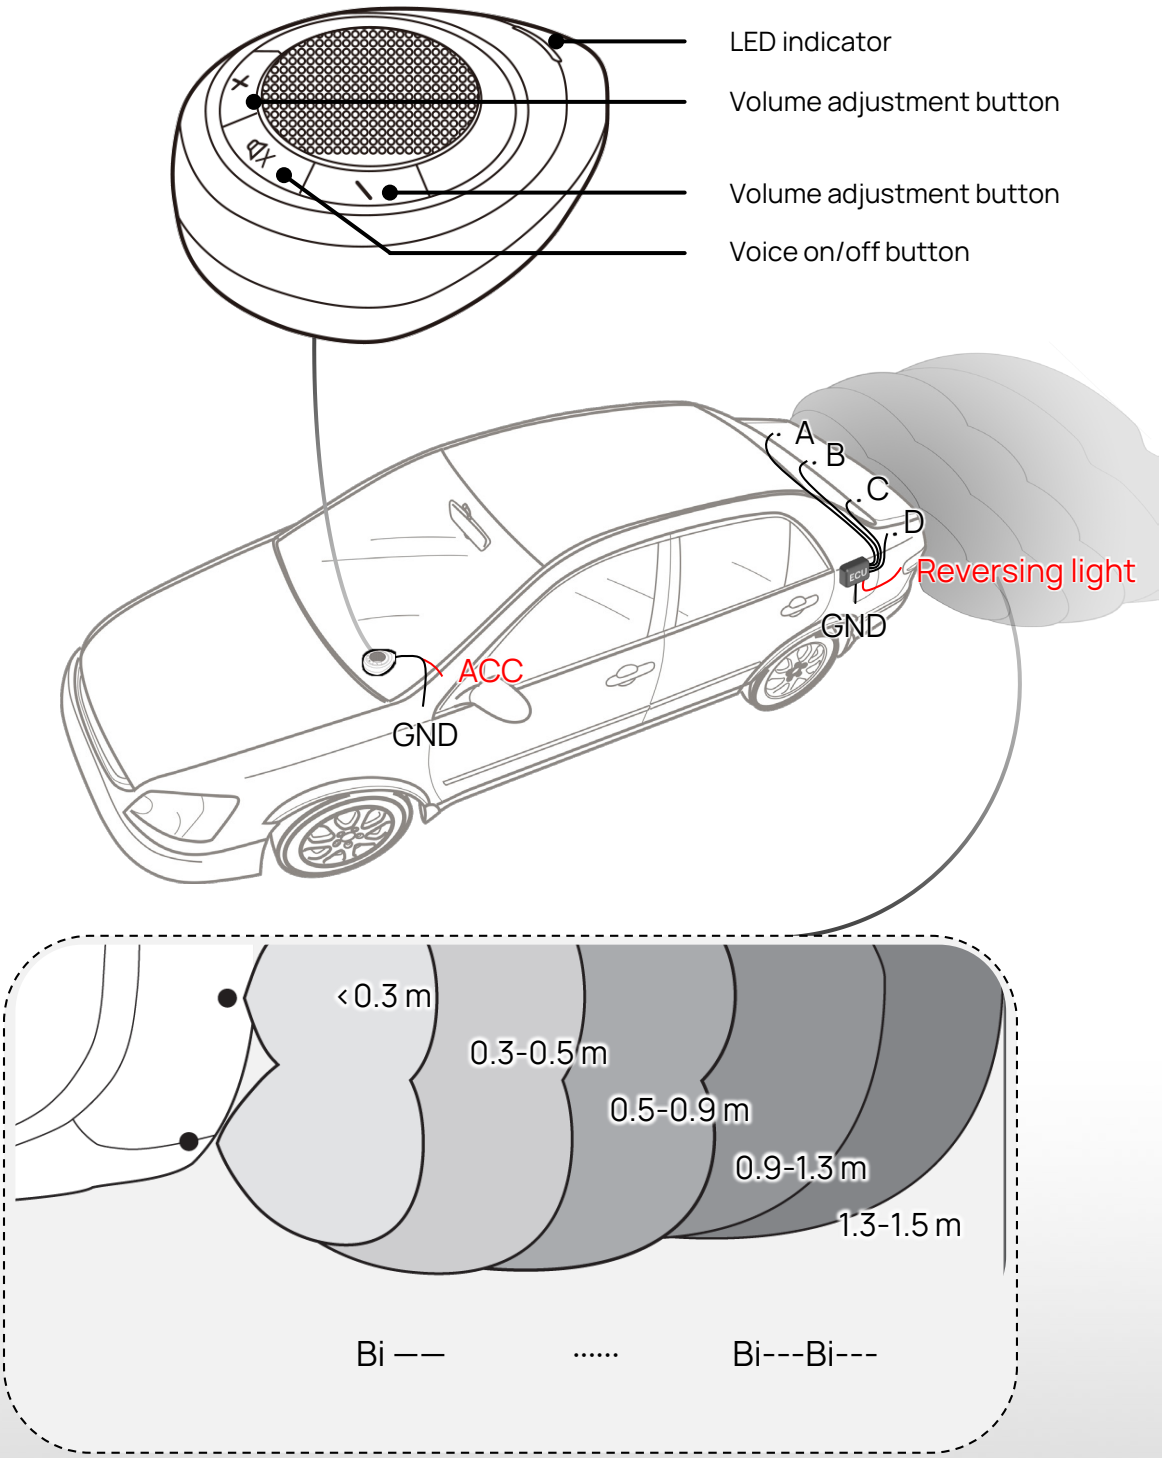

Technical Specifications:

Speaker:

Dimension:	56 * W76*H30 mm
Operating voltage:	9~32V
Operating current:	‹300mA
Operating temperature:	-40℃~+80℃ / -40℉~+176℉
Storage temperature	-40℃~+85℃ / -40℉~+185℉
Buzzer SPL:	70~90dB

ECU:

Operating voltage:	9~32V
Operating current:	‹150mA
Sensor installation height:	45~55cm / 1.5~1.8ft
Detecting range:	0.3m~1.5m / 1.0~5.0ft
Operating temperature:	-40℃~+80℃ / -40℉~+176℉
Storage temperature	-40℃~+85℃ / -40℉~+185℉

Parking sensor:

Drill Diameter:	18.8mm
Horizontal range:	110° ± 15°
Vertical range:	60° ± 15°
Sensitivity:	180 ± 100mV
Operating temperature:	-40℃~+80℃ / -40℉~+176℉